

Product Description

- ◆ MOSFET Output
- ◆ Control Voltage: 3-10VDC, 10-28VDC
- ◆ Load Voltage: 60VDC, 100VDC, 200VDC, 400VDC
- ◆ Load Current: 3A, 5A, 10A, 20A
- ◆ Dielectric Strength: 2500Vrms
- ◆ RoHS Compliant



Ordering Information

KSL	60	D	20	-L	(XXX)
KSI Series (1)	Load Voltage 60: 0-50VDC 100: 0-75VDC 200: 0-175VDC 400: 0-300VDC	DC Control	Load Current 3: 3Amp 5: 5Amp 10: 10Amp 20: 20Amp	Control Voltage L: 3-10VDC H: 10-28VDC	Customized Code

Note (1): Note: Part numbers available are listed in the table below.

Information	3A	5A	10A	20A
L	KSL400D3-L	KSL200D5-L	KSL100D10-L	KSL60D20-L
H	KSL400D3-H	KSL200D5-H	KSL100D10-H	KSL60D20-H

General Specifications

Input Specifications (Ta=25°C)		
Control Voltage Range	L	3-10VDC
	H	10-28VDC
Must Turn-On Voltage	L	3VDC
	H	10VDC
Must Turn-Off Voltage	1VDC	
Maximum Input Current	25mA	
Output Specifications (Ta=25°C)		
Load Voltage Range	60	0-60VDC
	100	0-100VDC
	200	0-200VDC
	400	0-400VDC
Maximum Transient Overvoltage	60	60Vpk
	100	100Vpk
	200	200Vpk
	400	400Vpk

General Specifications

Maximum 1 Cycle Surge Current (50Hz)	3A		15A
	5A		25A
	10A		50A
	20A		100A
Maximum Turn-On Time	6ms		
Maximum Turn-Off Time	1ms		
Maximum Off-State Leakage Current@Rated Load Voltage	0.1mA		
Maximum On-State Resistance	3A		375mΩ
	5A		150mΩ
	10A		38mΩ
	20A		10mΩ
On-state Resistance	3A	Tj=25°C(Typical)	135mΩ
		Tj=125°C(Maximum)	375mΩ
	5A	Tj=25°C(Typical)	60mΩ
		Tj=125°C(Maximum)	150mΩ
	10A	Tj=25°C(Typical)	11mΩ
		Tj=125°C(Maximum)	38mΩ
	20A	Tj=25°C(Typical)	3.7mΩ
		Tj=125°C(Maximum)	10mΩ


General Specifications (Ta=25°C)

Dielectric Strength (50/60Hz)	2500Vrms
Minimum Insulation Resistance (@500VDC)	1000MΩ
Ambient Temperature Range	-30°C ~ +80°C
Storage Temperature Range	-30°C ~ +100°C
Weight (Typical)	20g


Applications

Suitable for DC motors, DC power supplies, electro-mechanical devices, and etc.

Outline Dimensions




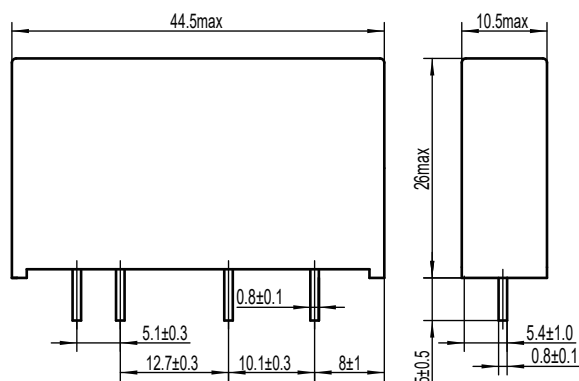


Outline Dimensions

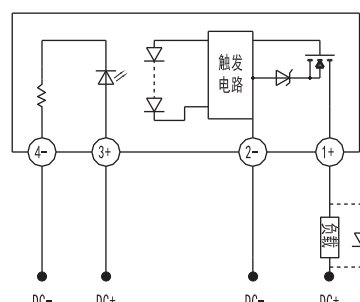

Wiring Diagram

Thermal Derating Curve

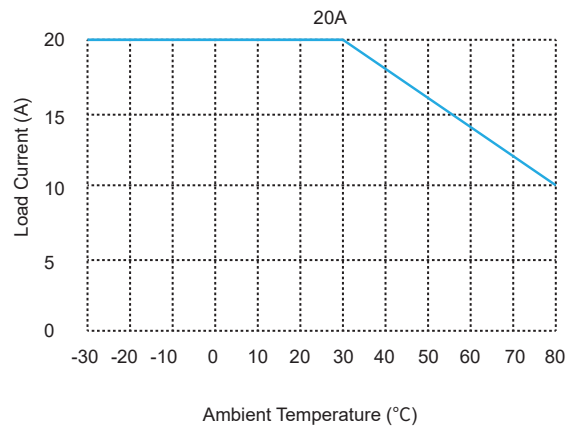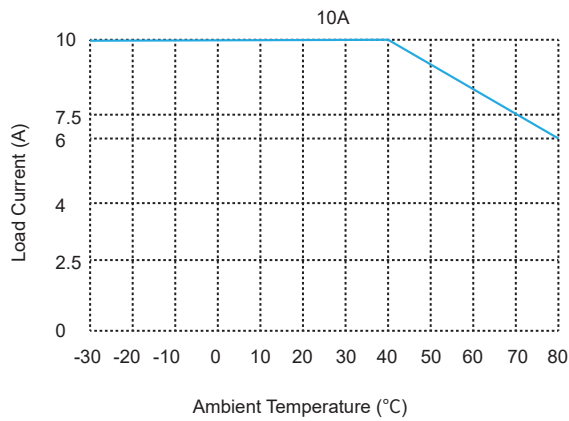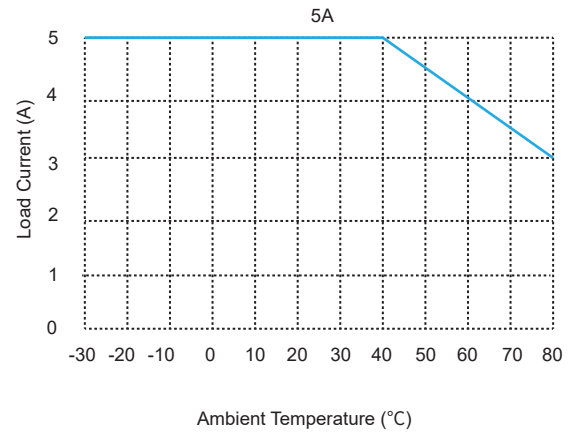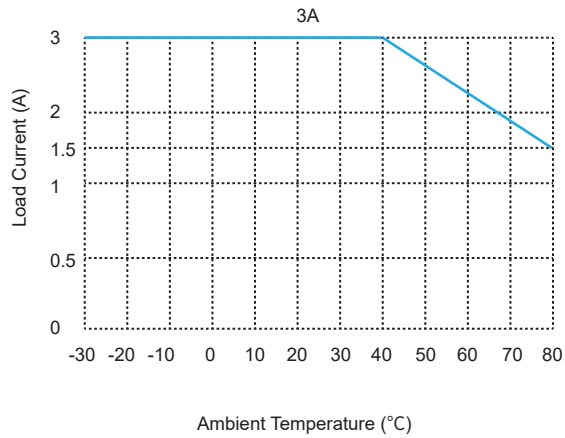

General Notes

1. Soldering must be finished within 10 seconds at 260°C, or finished within 5 seconds at 350°C. Otherwise it may cause damage to the relay.
2. Terminal polarity must be observed. Otherwise it may cause damage to the relay.
3. When ambient temperature is above 25°C, the maximum load current decreases. See thermal derating curve.
4. Capacitive load will produce very high surge current at the moment of conduction, which may lead to the damage of solid state relay due to the excessive surge current. Therefore, if the actual load is capacitive, or the load has paralleled large capacitance, it is strongly recommended that NTC should be connected in series in the load loop to suppress surge current in order to avoid damage to the product.